

Flexibilní zábradlí pro pěší výška 1100 m





2R Pedestrian Barrier



2R Pedestrian Barrier + Kerb



3R Pedestrian Barrier




1R Barrier XL Hand Rail



2R Barrier XL Hand Rail







2R Barrier Hand Rail


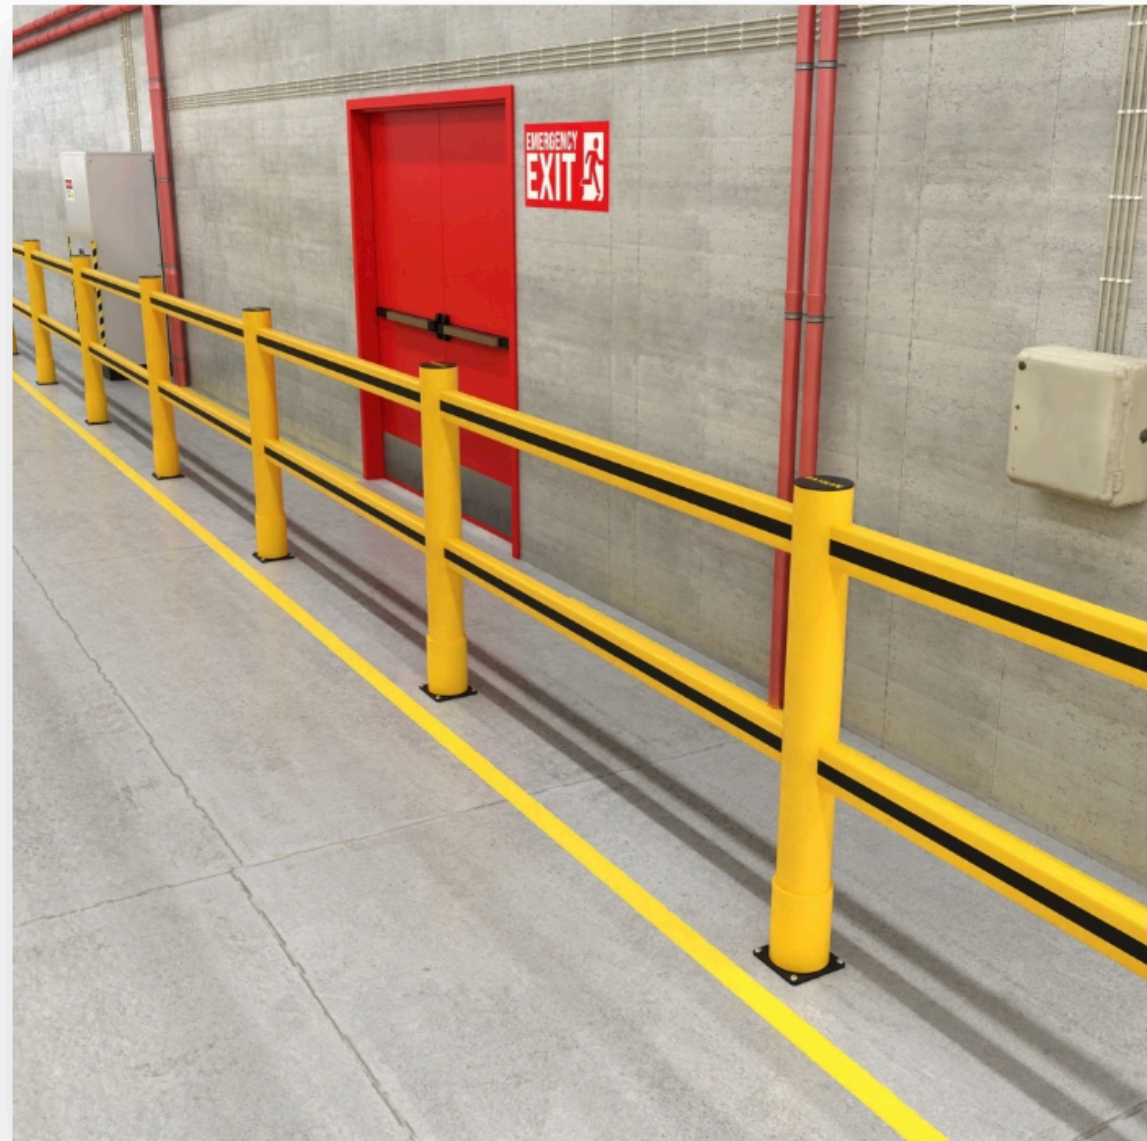


Pozemní nárazové zábrany




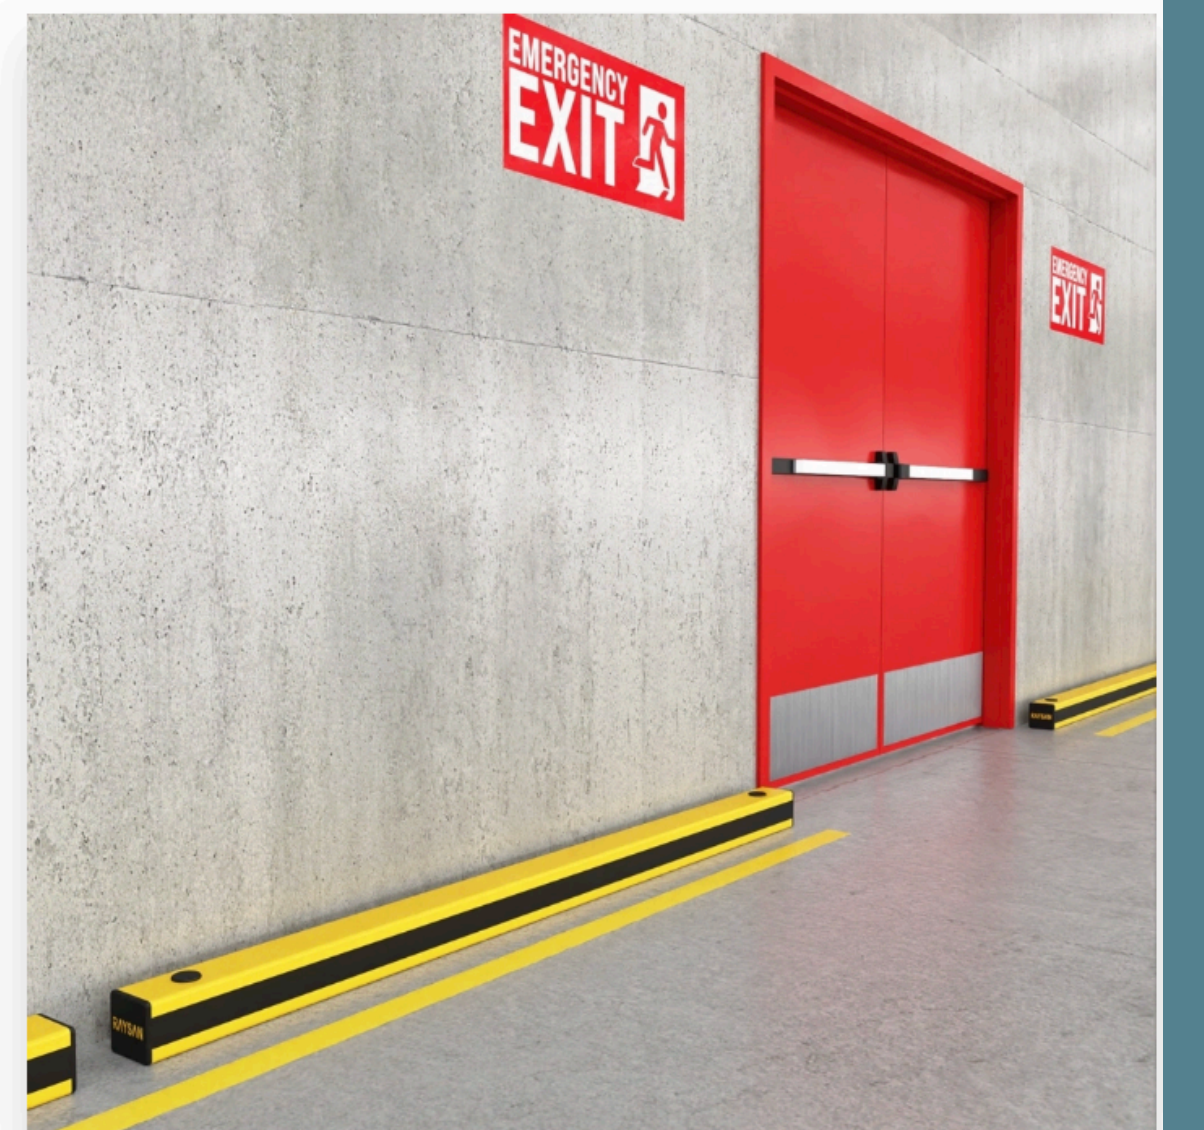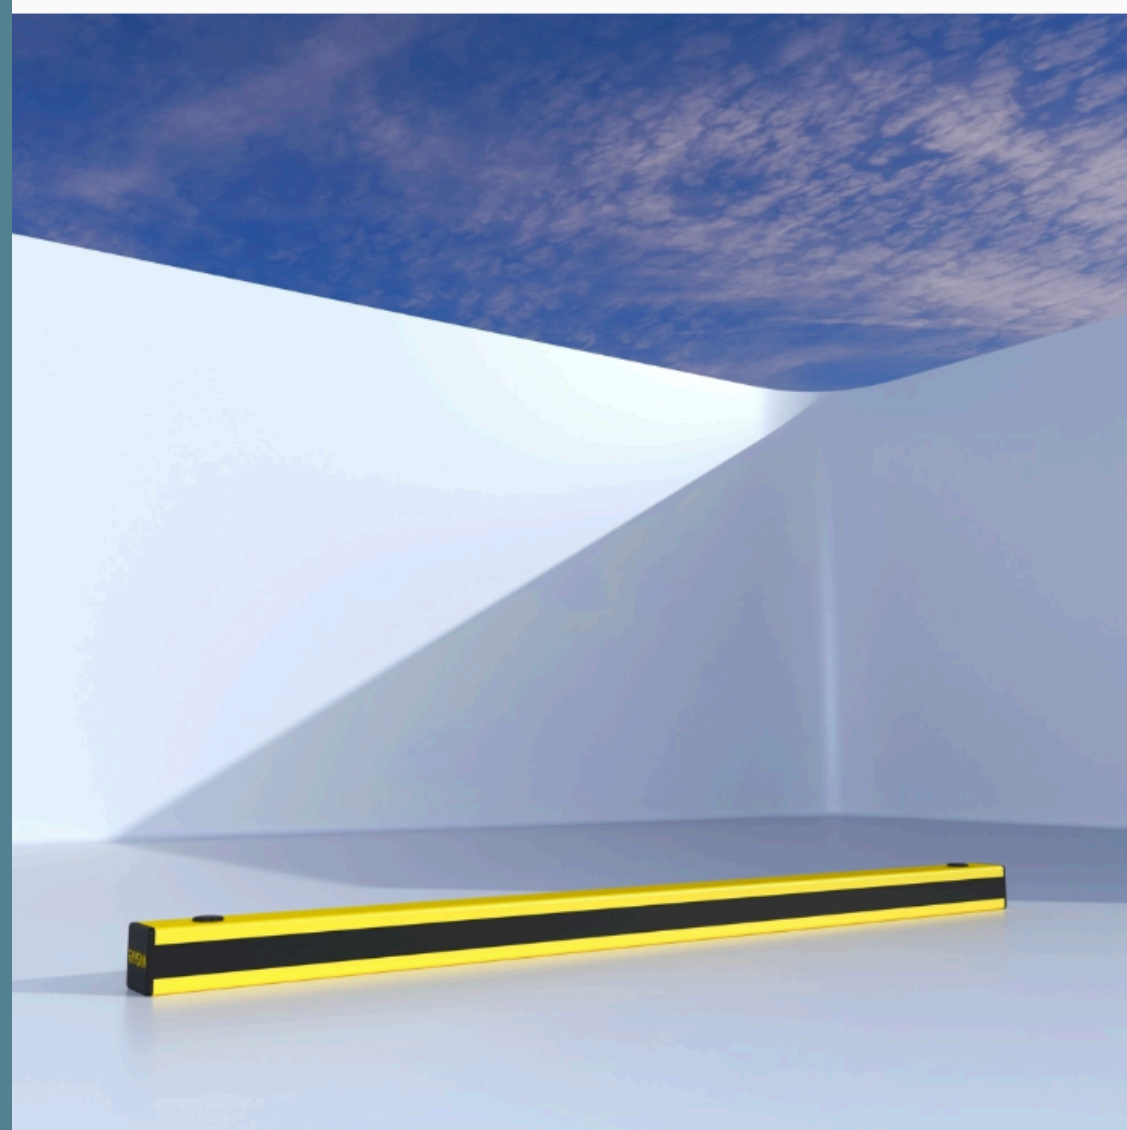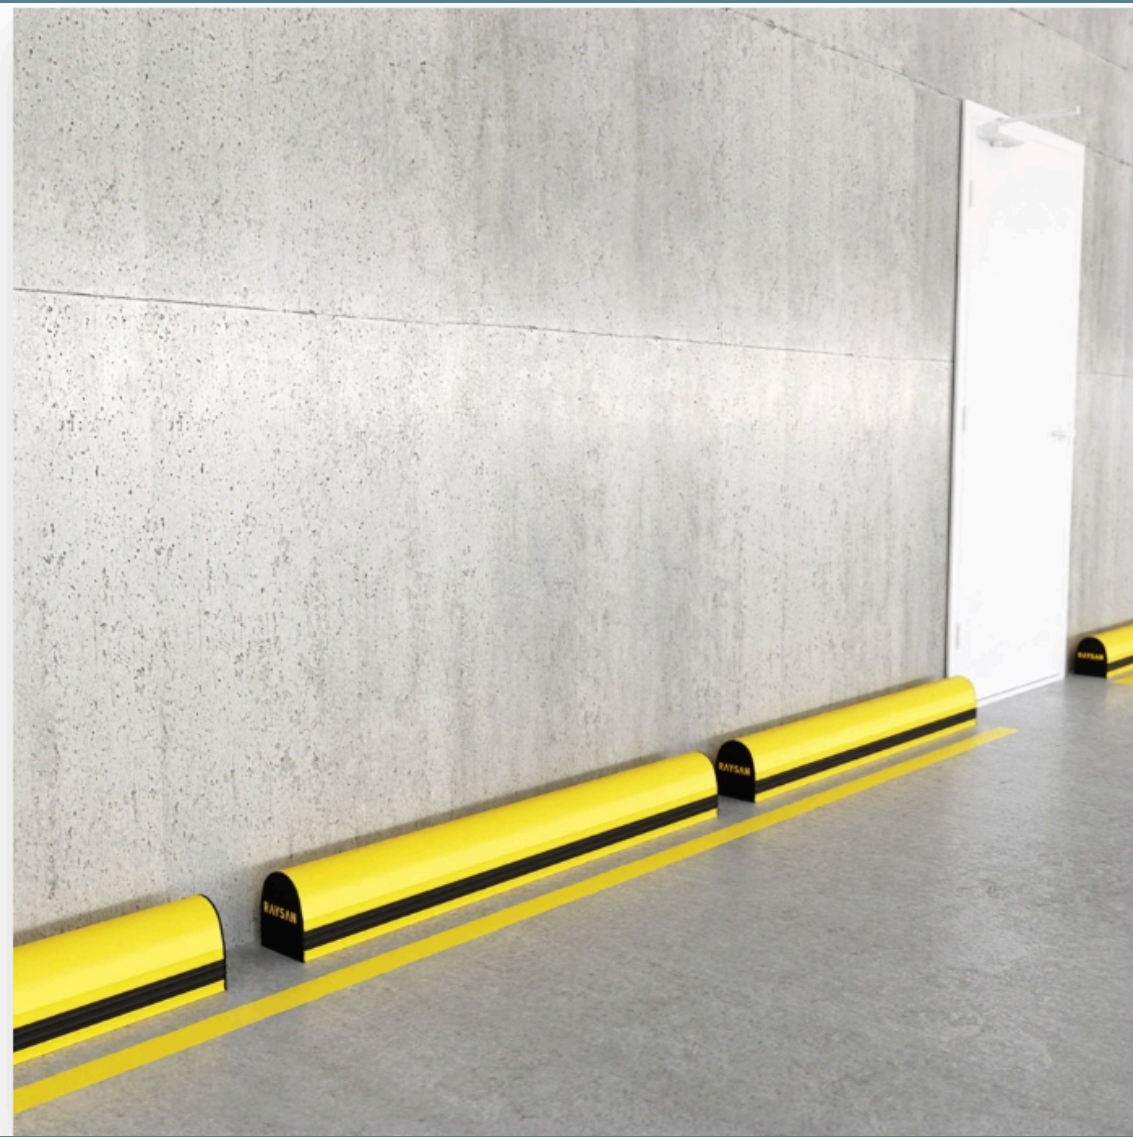
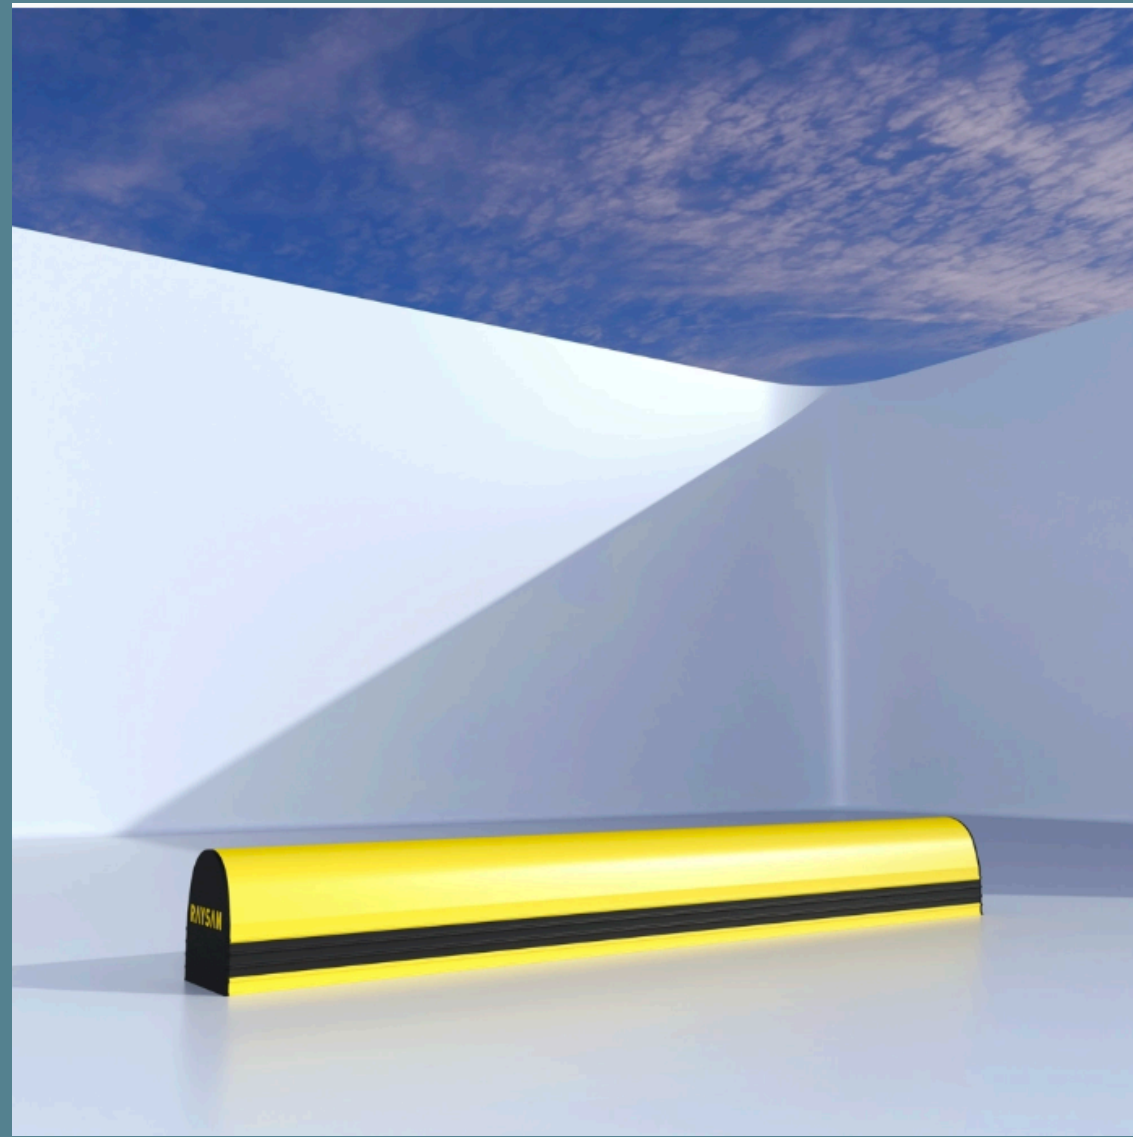


Sloupky

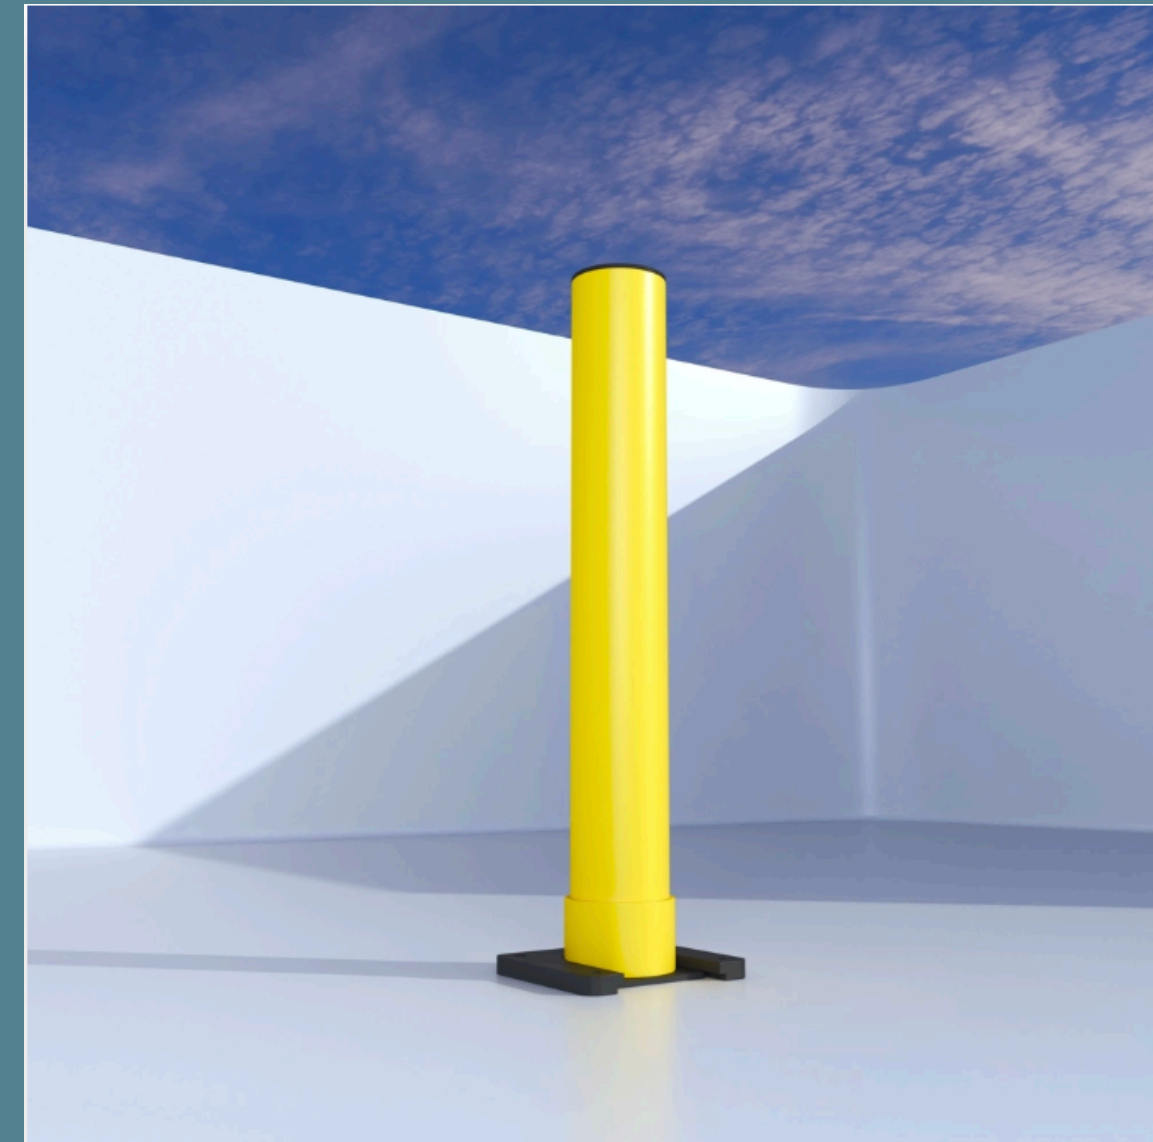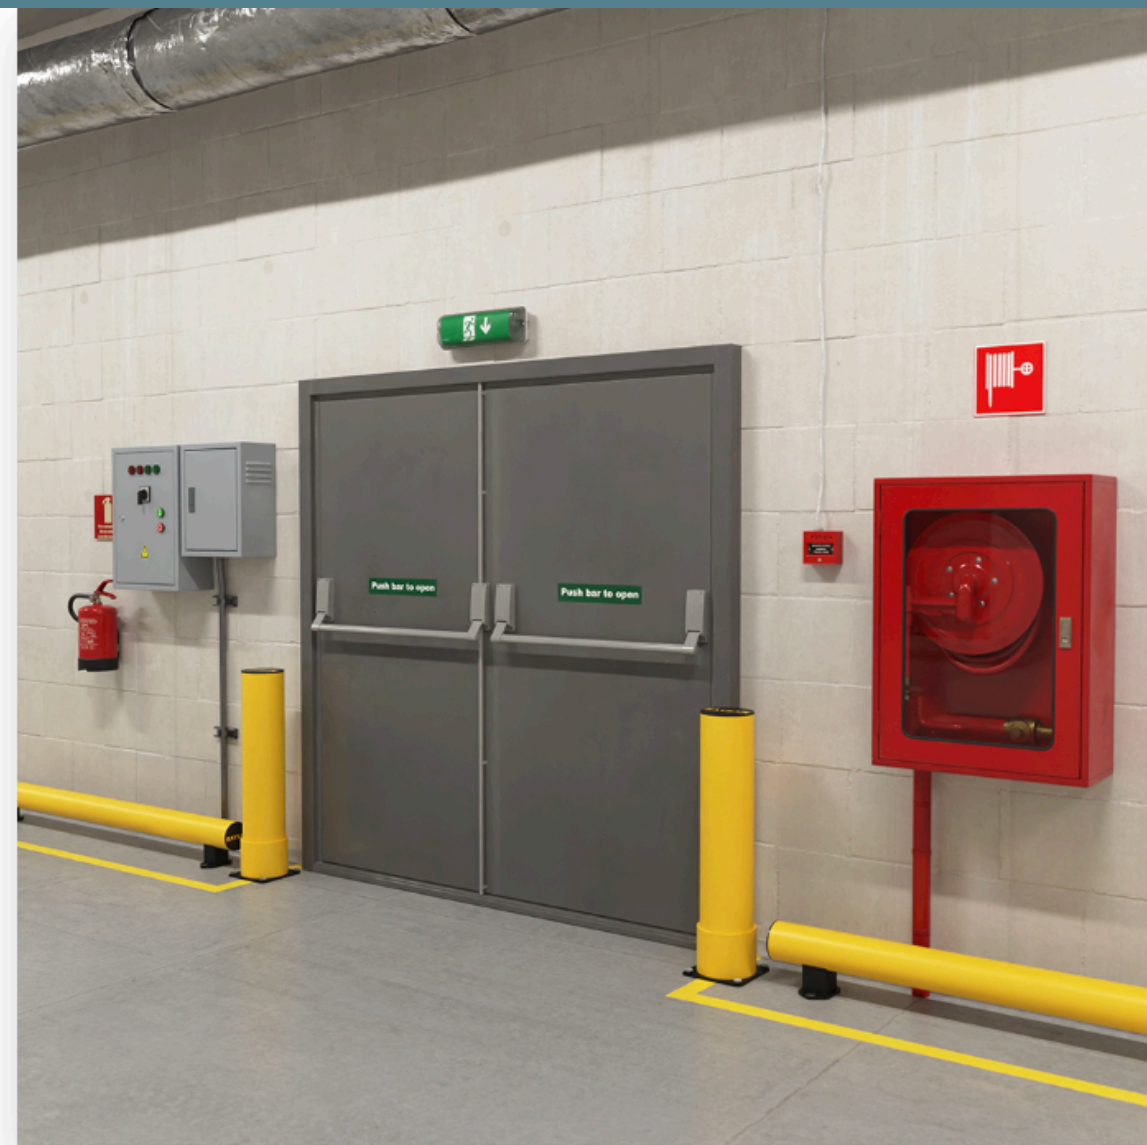

Ochrana sloupů

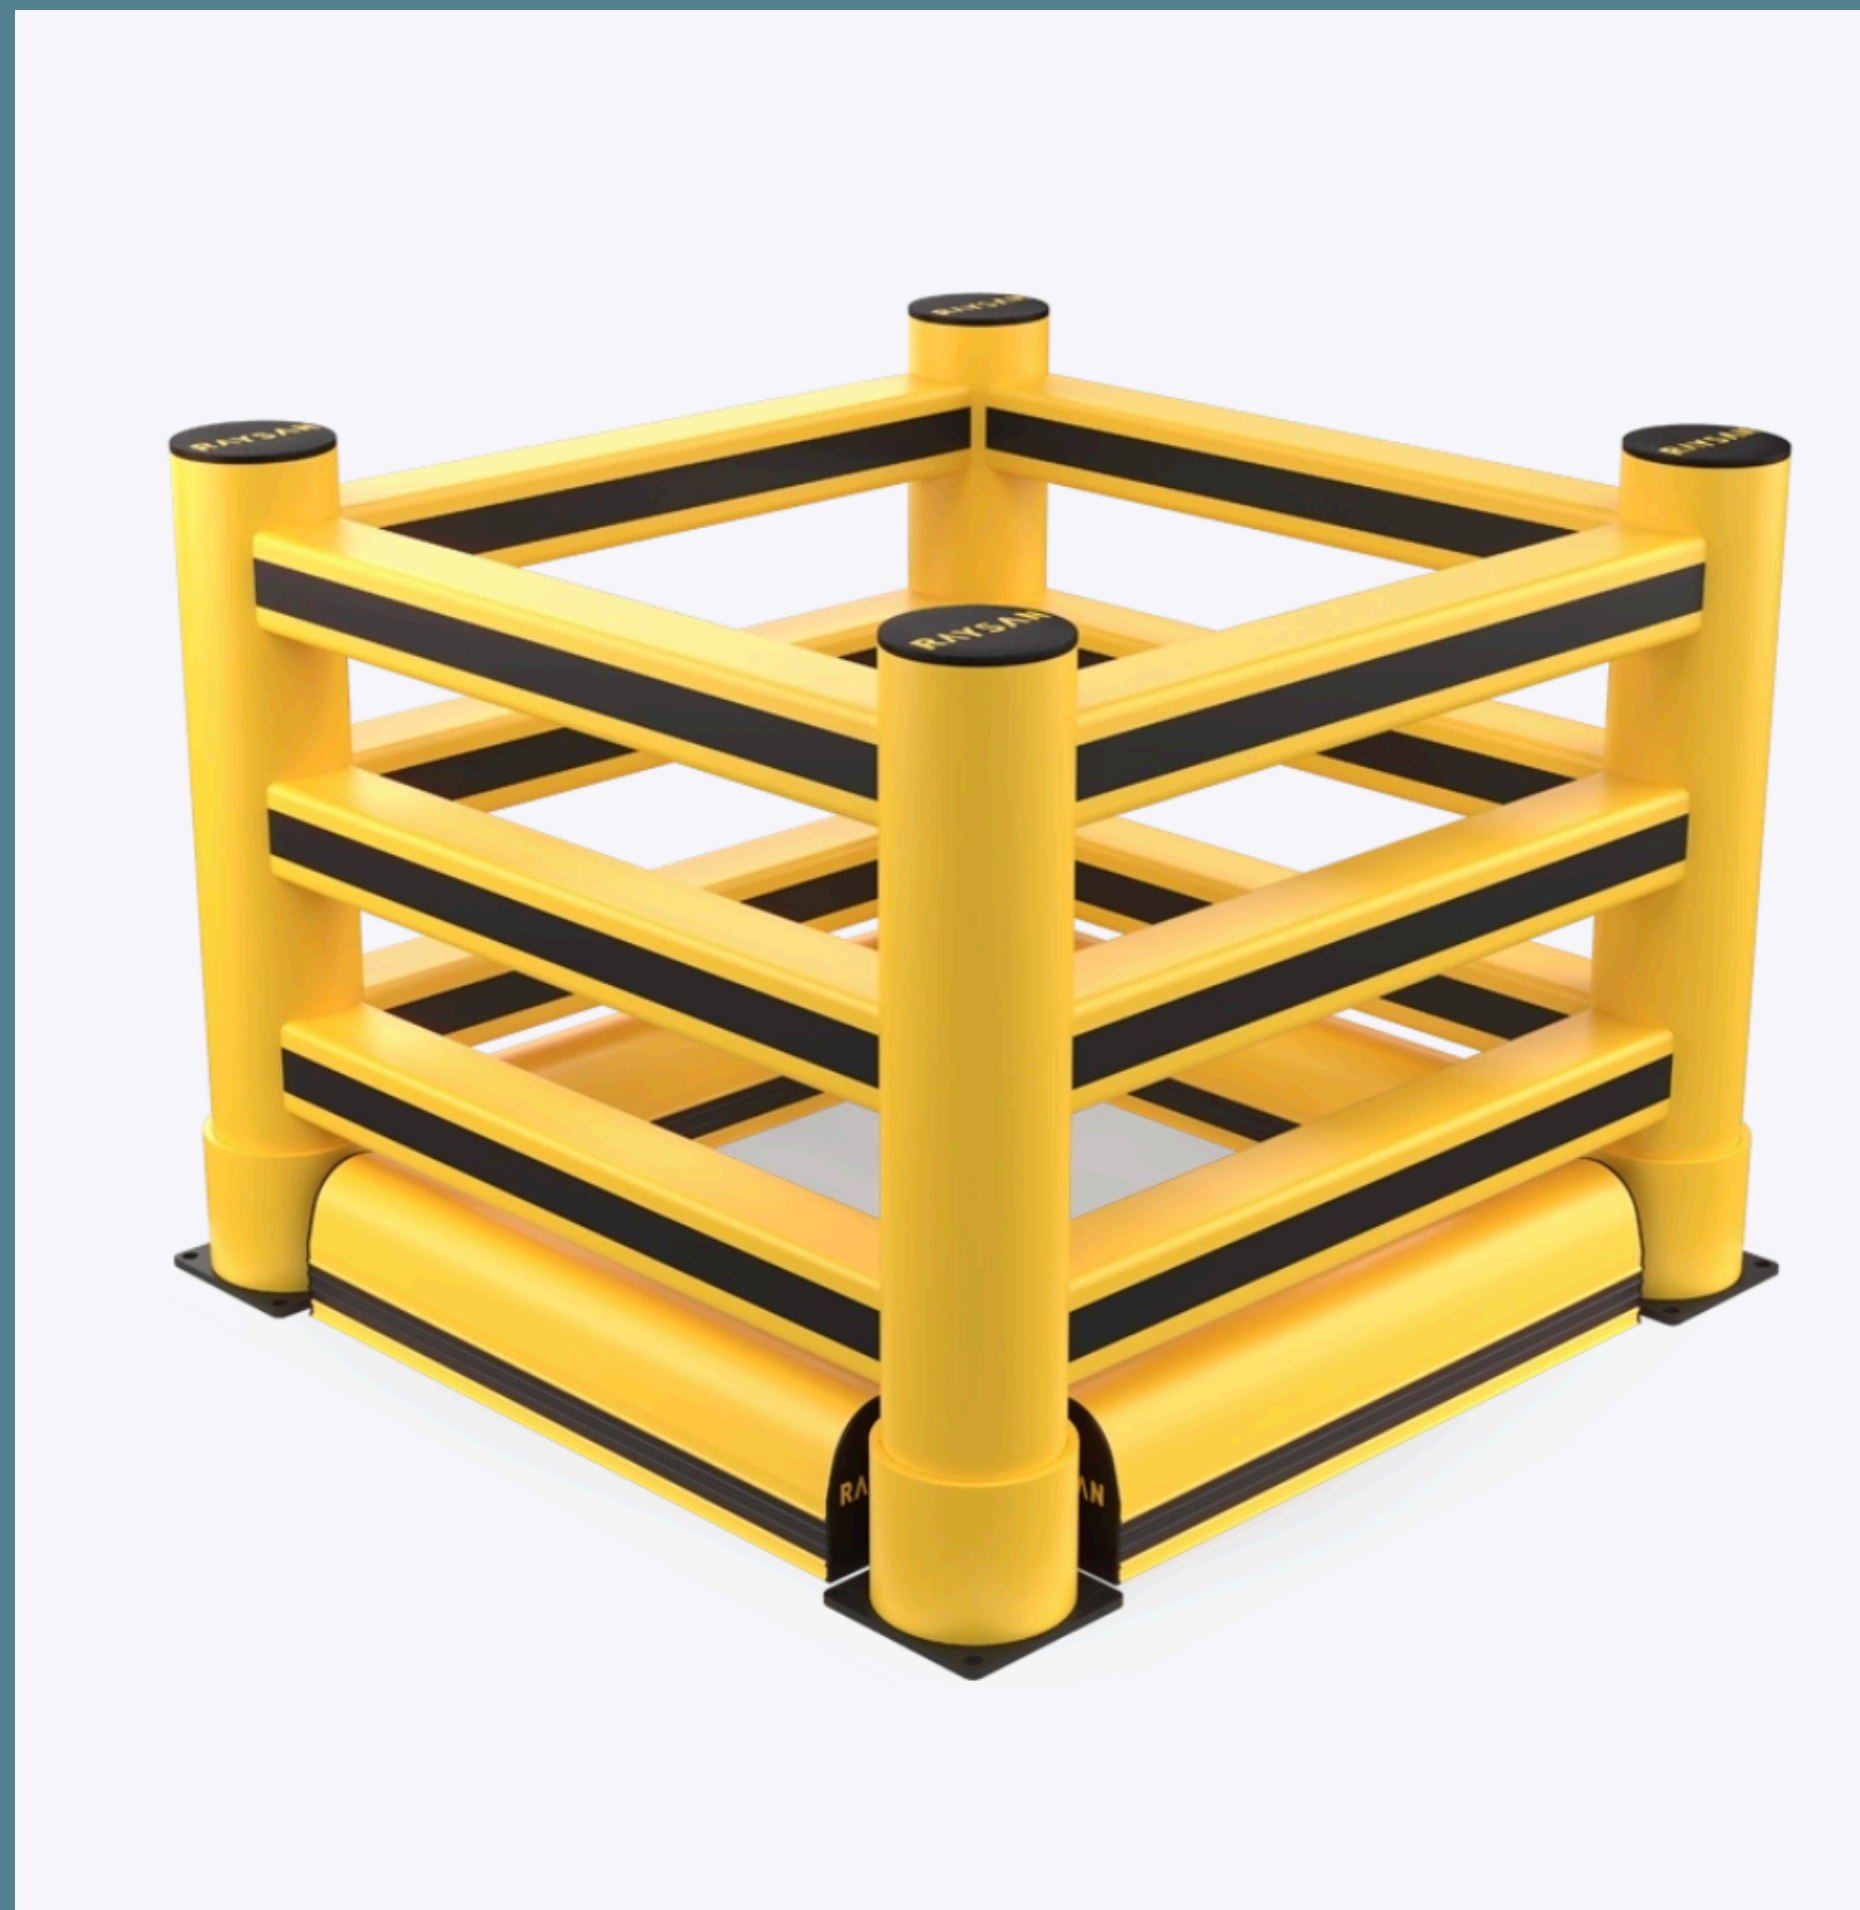

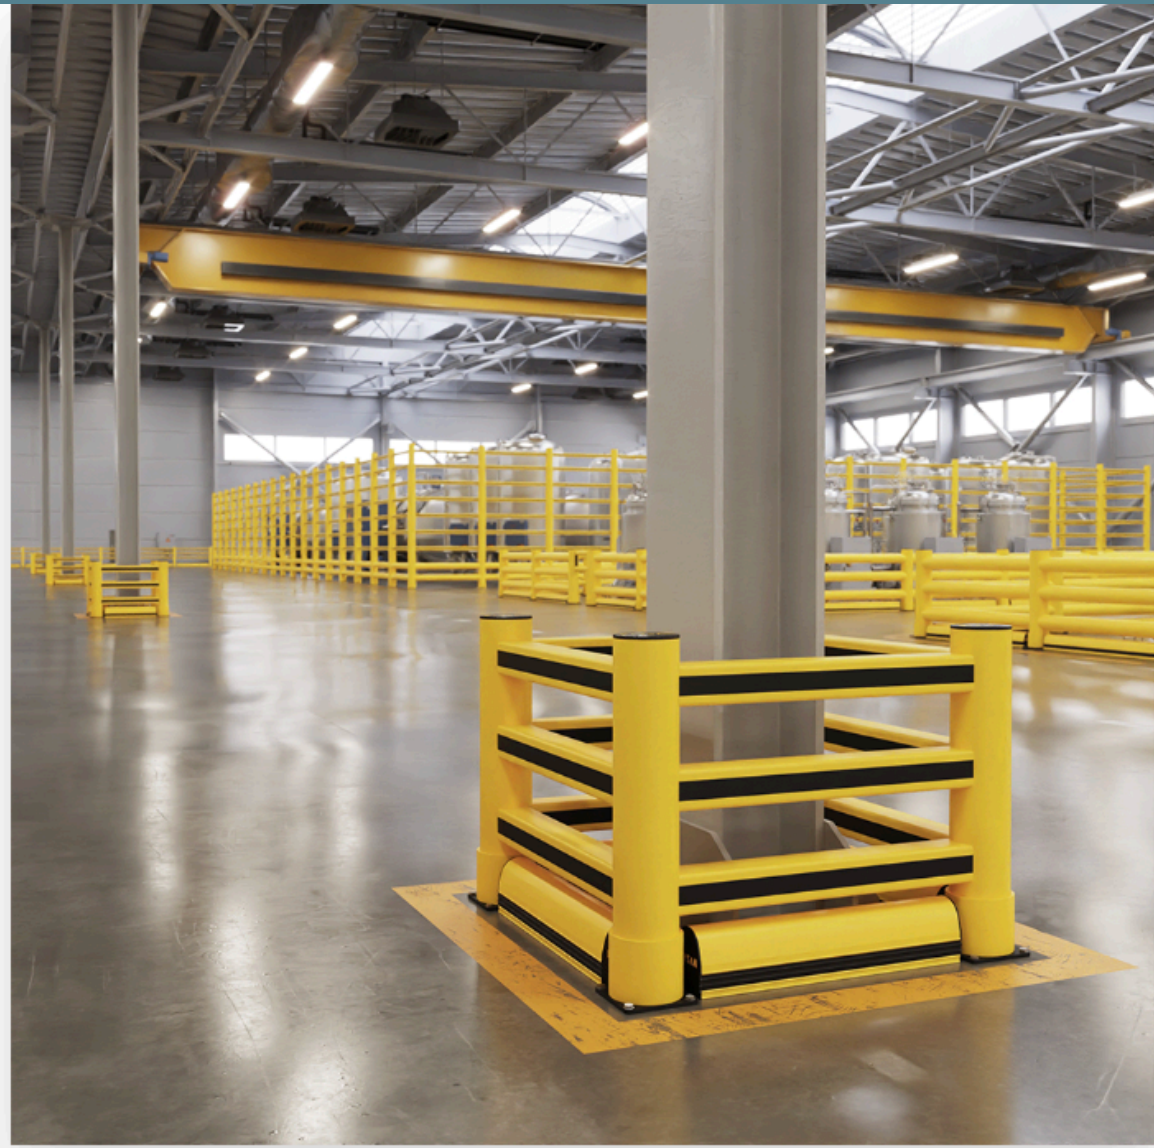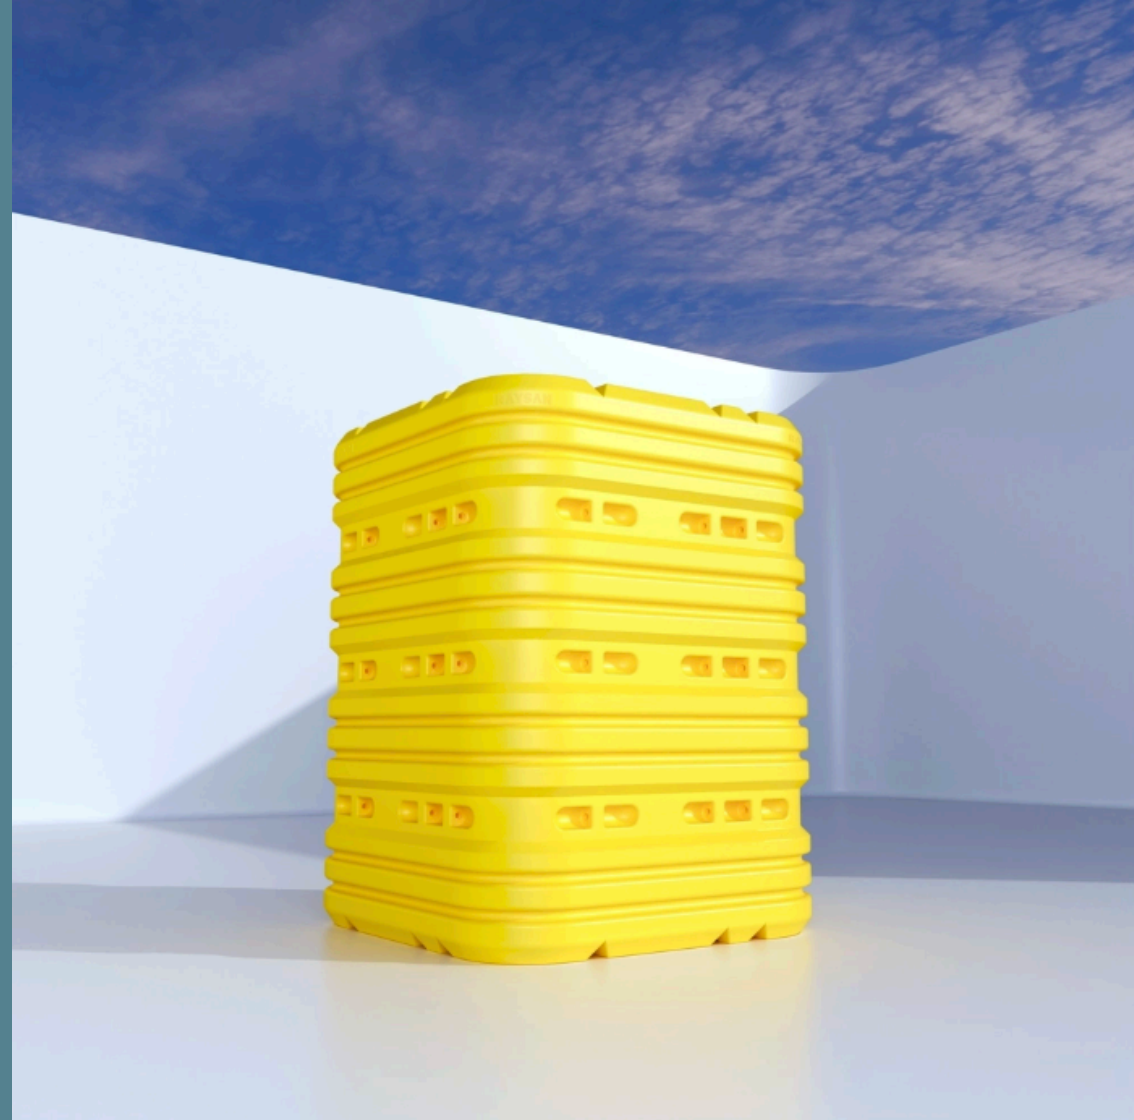




1R Column Barrier



1R Column Barrier + Kerb



1R Column Barrier Hexagon

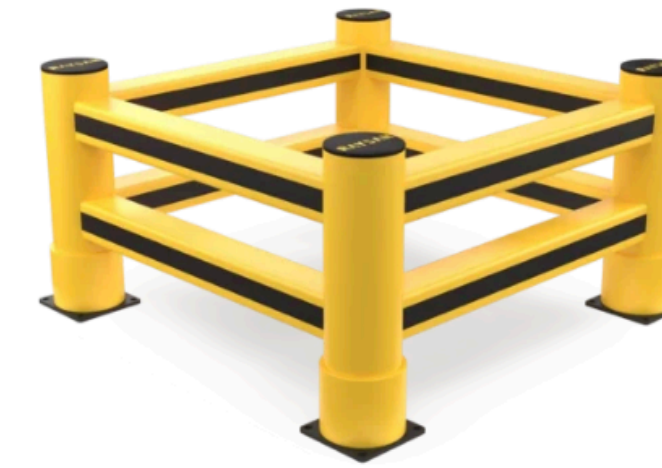

2R Column Barrier




PolyGuard Supreme




2R Column Barrier + Kerb




2R Column Barrier Hexagon

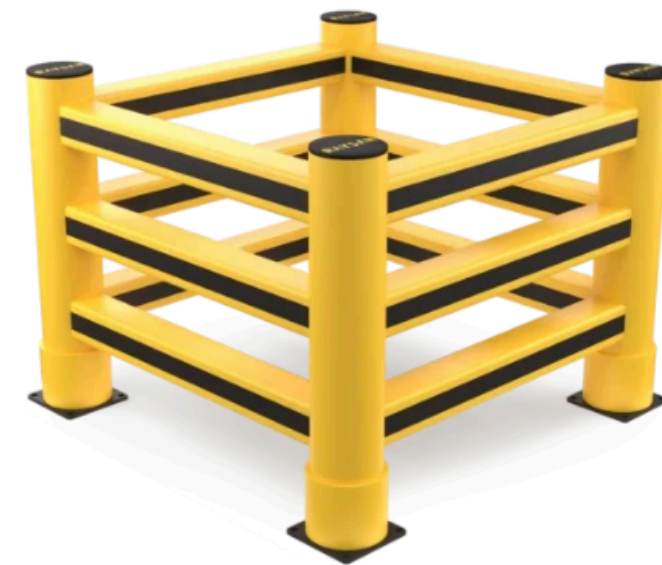

3R Column Barrier

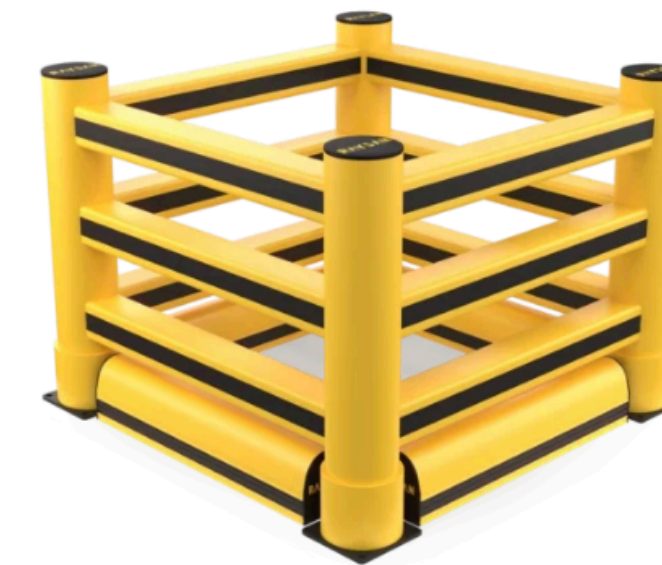

3R Column Barrier + Kerb

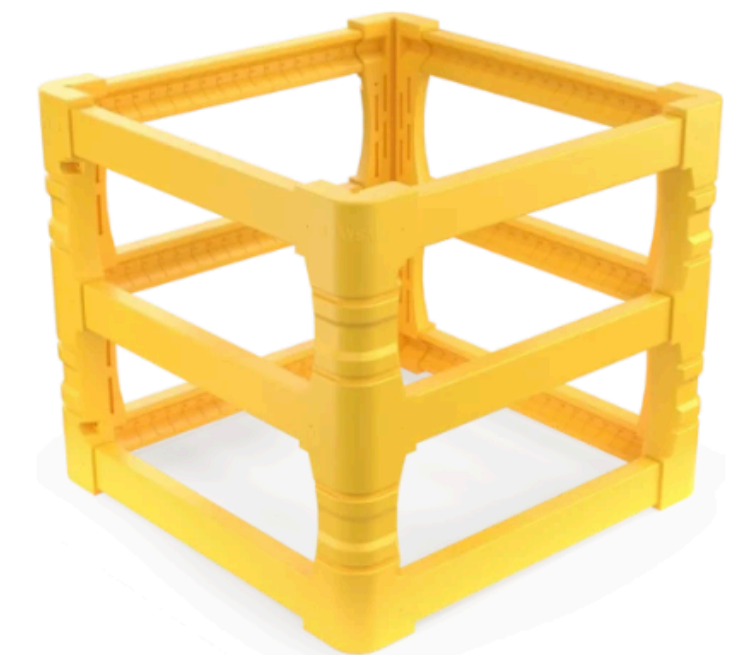



PolyGuard Eta

Technické data


PREVENT COSTLY DAMAGE WITH SMART COLUMN PROTECTION

Column protection barriers are essential for preventing structural damage and costly repairs caused by forklift impacts. They enhance workplace safety by absorbing and dispersing impact forces, reducing the risk of accidents and downtime. Investing in these barriers safeguards infrastructure, extends the lifespan of columns, and lowers maintenance costs, making operations more efficient and cost-effective.

TECHNICAL DRAWING

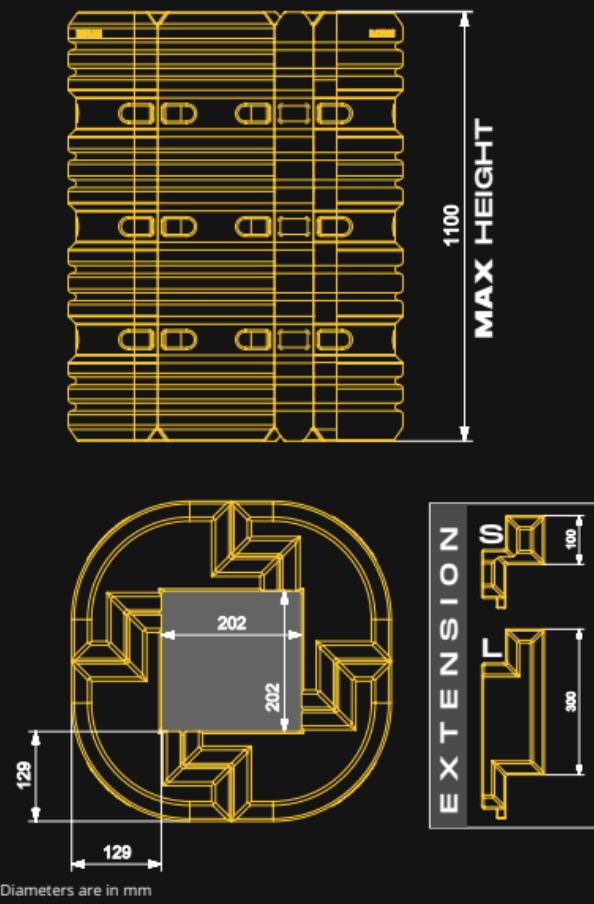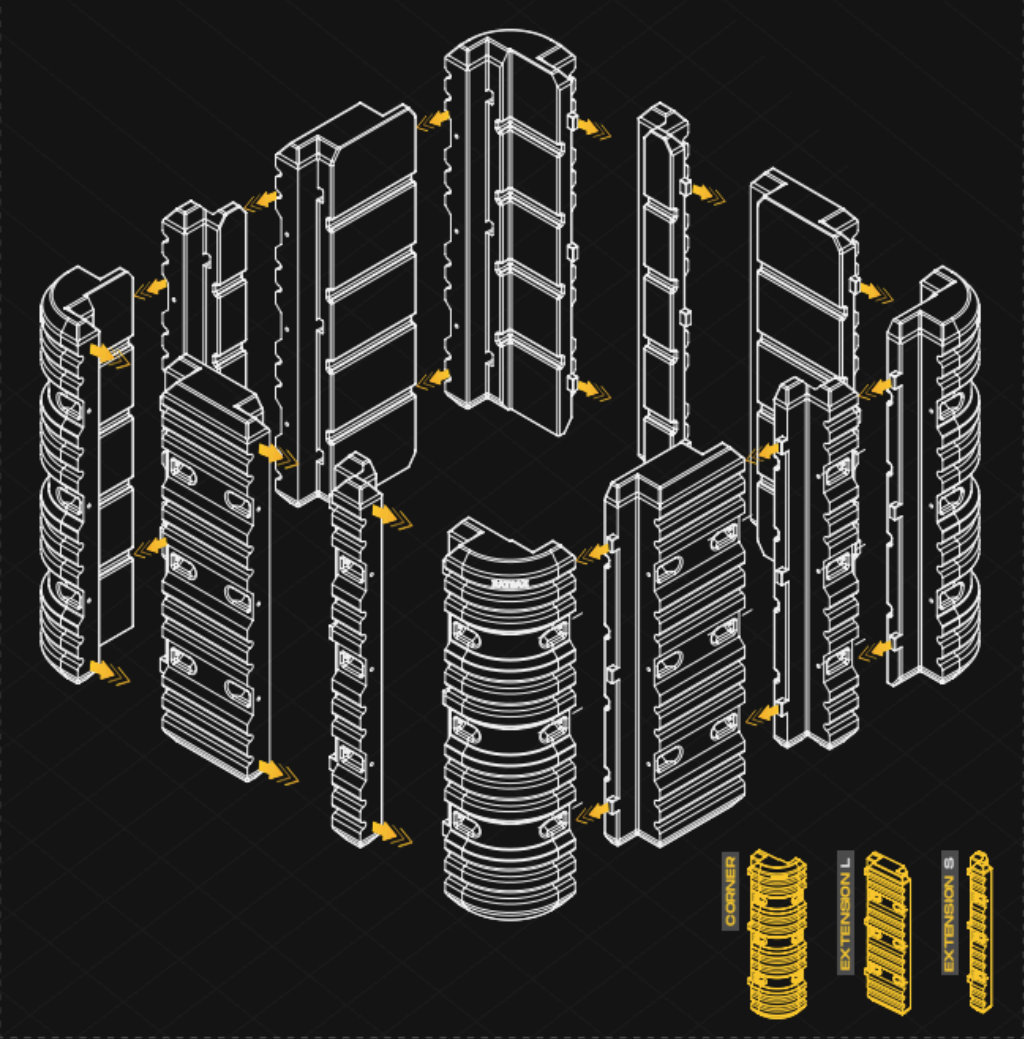

COLUMN DIMENSIONS	C PCS	S PCS	L PCS
300X300	4	4	—
400X400	4	8	—
500X500	4	—	4
600X600	4	4	4

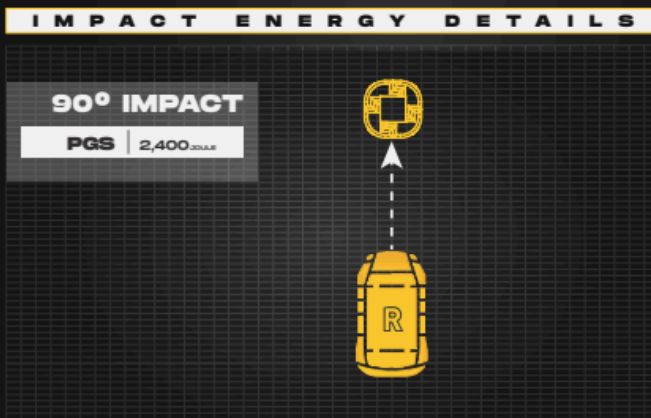

Water and Humidity	Ideal for both indoor and outdoor use or environments with frequent exposure to water and humidity.
--------------------	---

*90° Impact on Mid Rail of Maximum Post Centres
*Results are Reflecting Instantaneous Impact Values
*Does not Provide Resistance to Sharp Impacts



STANDART COLOR RAL 1015 PANTONE 123C *Please note that the RAL and PANTONE colours listed are the closest match to standard RAL/PANTONE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

ZETA



Post Dimension [D1]	Rail Dimension [D2]	Height Max [H]	Barrier Length MAX [L]	Impact Zone [Z]
Ø160 mm	100 mm x 100 mm	1000 mm	Column [C] + 400 mm	730 mm

TETA

Post Dimension [D1]	Rail Dimension [D2]	Height Max [H]	Barrier Length MAX [L]	Impact Zone [Z]
Ø125 mm	50 mm x 100 mm	1000 mm	Column [C] + 330 mm	730 mm



TECHNICAL DRAWING

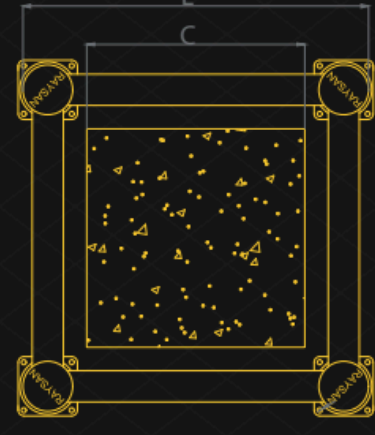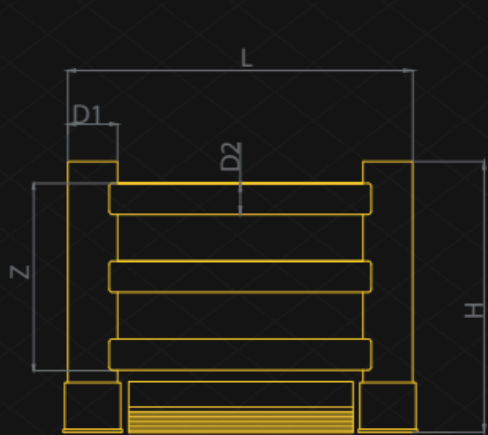

FIXING REQUIREMENTS



Concrete Quality	Minimum C25/30
Concrete Floor Plate Thickness (mm)	Minimum 150 mm
Water and Humidity	Steel (standard) : Suitable for dry indoor use only. Galvanize : Can be used in most outdoor environments. Stainless Steel : Ideal for outdoor use or environments with frequent exposure to water and humidity.

SUITABLE APPLICATION



BUILDING AND EQUIPMENT SAFEGUARDS



COLUMN PROTECTION SOLUTIONS

SUITABLE FOR



*Please note that the RAL and PANTONE colours listed are the closest match to standard RAL/PANTONE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

Vysoce odolné zábrany





1R Barrier



1R Barrier + Kerb



1R Barrier XL



2R Barrier



2R Barrier + Kerb



2R Barrier XL



3R Barrier




3R Barrier + Kerb

Nárazová zábrana za regály



Regálové chrániče

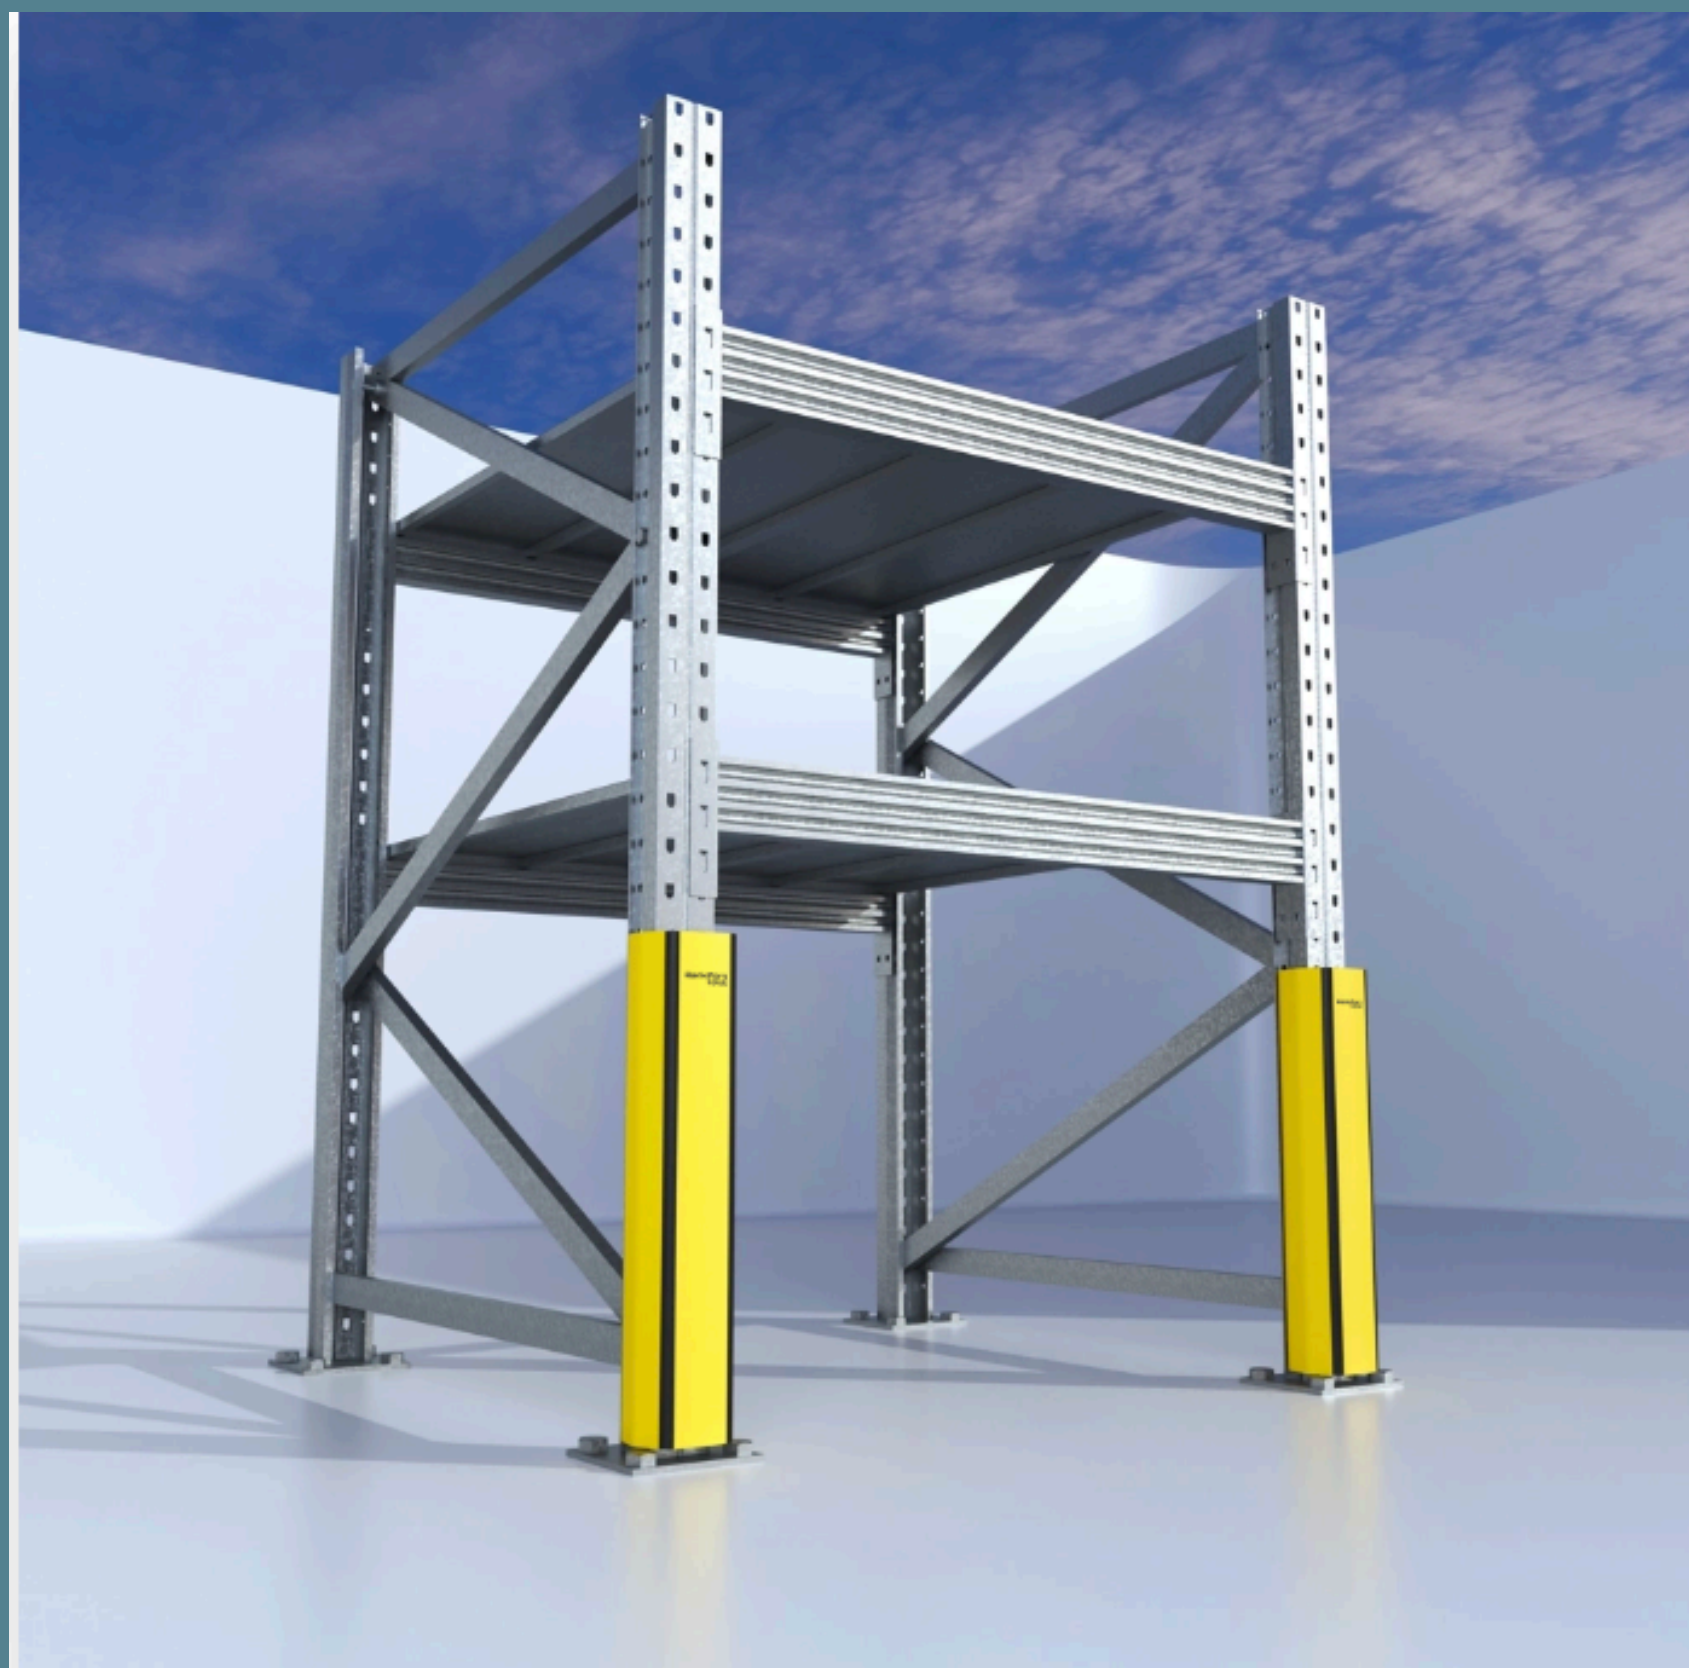

Yron Company s. r. o. - firma specializovaná na vyhledávání rizik na pracovišti, řešení BOZP, zabezpečení výrobních hal, skladovacích prostor, zakázkovou výrobu

Katalog - Flexibilní zábrany splňují normy **ISO 9001:2015**

PAS 13:2017

REACH SVHC

Test REACH SVHC (Candidate List for Candidate Evaluation) je test k určení potenciálních rizik chemických látek pro lidské zdraví a životní prostředí. Tento test se provádí v souladu s nařízením REACH (Registration, Evaluation, Authorization and Restriction of Chemicals) nařízením Evropské unie (EU).

TÜV NORD je celosvětová organizace, která vydává certifikace podle mezinárodních norem k ověření kvality, bezpečnosti a ekologické shody produktů, služeb a podniků. Tyto certifikace poskytují nezávislé ověření kvality a bezpečnosti produktů a služeb.

Web : yron.cz

Phone : + 420 739 431 099
